

PT-FIT 35/220...240 S

POWERTRONIC PT-FIT S | ECG for HID lamps, for installation in luminaires



Product family features

- Energy Efficiency Index EEI: A2
- Supply voltage: 220...240 V
- Line frequency: 50...60 Hz
- RI suppression: to EN 55015/CISPR 15
- Safety: to EN 61347-2-12
- Line harmonics according to EN 61000-3-2
- Immunity according to EN 61547

Product family benefits

- Optimized cost/benefit factor
- Compact dimensions and low weight for small luminaire designs
- Automatic safety shutdown of lamps in the event of a defect or at end of life (EoL)

Areas of application

- Shop lighting
- Health and fitness areas (in luminaires with protection class IP66 or higher)
- Effect and accent lighting

Product datasheet

Technical data

Electrical data

Lamp wattage	39 W
Maximum output power	39 W
Line current	0.19 A ¹⁾
Ignition voltage	4.5 kVp
Operating frequency	0.200...0.240 kHz
System wattage	43.00 W
Efficiency in full-load	91 %
Input voltage AC	198...264 V
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Power factor λ	0.95 ²⁾
Inrush current	30 A ³⁾
Max. ECG no. on circuit breaker 10 A (B)	15 ⁴⁾
Max. ECG no. on circuit breaker 16 A (B)	26 ⁴⁾
Max. no. of ECGs on 16A MCB with EBN-OS	65 ⁴⁾
Protective conductor current	0.3 mA
U-OUT (working voltage)	250 V
Max. working voltage between LH and LL	250 V
Max. working voltage betw. LL/LH & earth	250 V
Max. capacitance of wire ECG/lamp	120 pF


¹⁾ At 230 V_{AC}

²⁾ Minimum

³⁾ $t_{width} = 150 \mu s$ (measured at 50 % I_{peak})

⁴⁾ Type B

Dimensions & weight

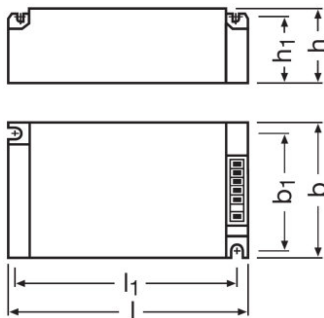

Length	110.0 mm
--------	----------

Product datasheet

Width	75.0 mm
Height	30.0 mm
Mounting hole spacing, length	99.0 mm
Mounting hole spacing, width	64.0 mm
Cable cross-section, input side	0.5...1.0 / 0.5...1.5 mm ² ¹⁾
Cable cross-section, output side	0.5...1.0 / 0.5...1.5 mm ² ¹⁾
Wire preparation length, input side	8.5...9.5 mm
Wire preparation length, output side	8.5...9.5 mm
Product weight	245.00 g

¹⁾ With ferrule / Without ferrule

Colors & materials

Casing material	Metal
-----------------	-------

Temperatures & operating conditions

Ambient temperature range	-15...+65 °C
Maximum temperature at tc test point	85 °C

Lifespan

ECG lifetime	30000 h ¹⁾
--------------	-----------------------

¹⁾ At maximum T_c / 10% failure rate

Additional product data

Design / version	Built-in unit
Suitable for lamp power (1 lamp)	39 W

Capabilities

Max. cable length to lamp/LED module	1.5 m
Overheating protection	Power reduction and switch off at T > 85 °C at the tc point
ECG reset time	> 0.5 s
Dimmable	No
Restriction on ignition time	20 min
Suitable for fixtures with prot. class	I
Intended for no-load operation	No

Certificates & standards

Approval marks – approval	VDE / VDE-EMC / EAC / C-Tick
Type of protection	IP20
EEI – Energy Label	A2


Product datasheet

Standards	Acc. to EN 61347-2-12/Acc. to EN 55015/Acc. to EN 61000-3-2/Acc. to EN 61547
------------------	--

Logistical data

Commodity code	850410809000
-----------------------	--------------

Wiring Diagram

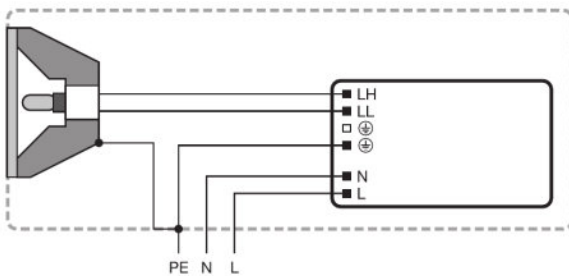

342165_Setup for ECG Installation


Safety advice

Ballast losses and lamp heat radiation can lead to heat accumulation in a completely closed case. Therefore it is necessary to ensure that the temperature at the measuring point t of the ECG does not exceed the maximum value.








Attention!

For safety reasons disconnect the device before replacing the lamp!

Download Data

File	
	Product Datasheet 321400_ATI PT-FIT 35220-240 S (G+GB)

Product datasheet

	Tender documents 339884_Tender Document for POWERTRONIC EVG.eng
	Certificates 335124_VDE-Marks approval
	Certificates 554891_EAC PT family
	Declarations of conformity Powertronic UK DoC 4278196 260121
	Declarations of conformity Powertronic CE 3363432 100821
	Declarations of conformity VD EMC Certificate 40025469
	Operating instructions 590729_EAC - PTI S PT-FIT S

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321386625	PT-FIT 35/220...240 S	Shipping carton box 20	412 mm x 136 mm x 152 mm	8.52 dm ³	5169.89 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

PT-FIT 35/220...240 S

POWERTRONIC PT-FIT S | ECG for HID lamps, for installation in luminaires

Product name	Lamp group
PT-FIT 35/220...240 S	HCI-T 35W
	HCI-TC 35W
	HCI-TF 35W